


# SMT Power Inductor

## HMU1356L Type


### Features

- RoHS compliant.
- Low profile, SMD type.
- High current.
- Magnetic shielded.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor applications.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.

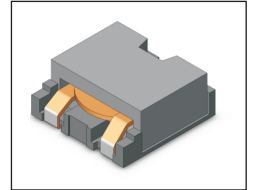

### Mechanical Dimension :

#### RECOMMENDED PAD PATTERNS

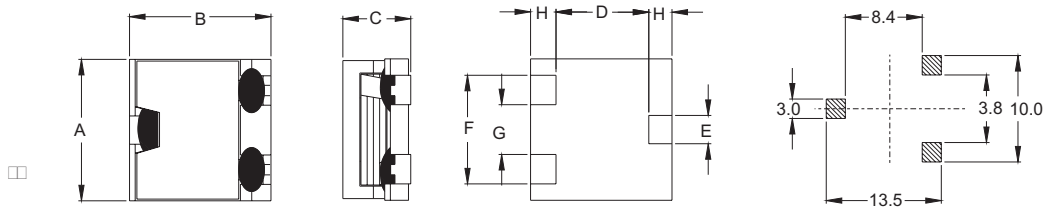

UNIT : mm/inch

|                             |
|-----------------------------|
| A = 12.60±0.4 / 0.496±0.016 |
| B = 12.70±0.3 / 0.500±0.012 |
| C = 5.60/ 0.220 Max.        |
| D = 8.95/ 0.352             |
| E = 2.50/ 0.098             |
| F = 9.50/ 0.374             |
| G = 4.30/ 0.169             |
| H = 1.90/ 0.075             |

### Electrical Characteristics : 25°C, 100KHz, 1V

| PART NO.     | L <sup>1</sup><br>(uH) | DCR<br>(mΩ) MAX | I <sub>sat</sub> <sup>2</sup><br>(A dc) | I <sub>rms</sub> <sup>3</sup><br>(A dc) |
|--------------|------------------------|-----------------|---|---|
| HMU1356L-0R6 | 0.6                    | 1.5             | 23.0                                    | 19.5                                    |
| HMU1356L-1R5 | 1.5                    | 2.2             | 14.0                                    | 18.0                                    |
| HMU1356L-2R5 | 2.5                    | 3.4             | 10.0                                    | 15.5                                    |
| HMU1356L-4R0 | 4.0                    | 5.4             | 8.3                                     | 12.5                                    |
| HMU1356L-6R0 | 6.0                    | 8.0             | 6.7                                     | 9.9                                     |
| HMU1356L-8R2 | 8.2                    | 11.4            | 5.8                                     | 8.2                                     |
| HMU1356L-100 | 10.0                   | 13.5            | 5.0                                     | 7.6                                     |

1. Tolerance of inductance is ±20%.
2. I<sub>sat</sub> is the DC current which cause the inductance drop approximately 20% of is nominal inductance without current.
3. I<sub>rms</sub> is the DC current which cause the surface temperature of the part increase less than 45°C.
4. Operating temperature : -20°C to 105°C ( including self-temperature rise ).



**DELTA ELECTRONICS, INC.**

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.  
 TEL: 886-3-3591968; FAX: 886-3-3591991  
<http://www.deltaww.com>